

Specification

Nominal Basket Diameter	10.00", 254 mm
Nominal Impedance	8 ohms ¹
Power Rating	275 W ²
Usable Frequency Range	70 Hz-3.7k Hz ³
Sensitivity	98.0
Magnet Weight	56 oz.
Gap Height	0.39", 10.01 mm
Voice Coil Diameter	2.50", 63.5 mm

Thiele & Small Parameters

Resonance (fs)	60 Hz
DC Resistance (Re)	5.7
Coil Inductance (Le)	0.60 mH
Mechanical Q (Qms)	7.35
Electromagnetic Q (Qes)	0.36
Total Q (Qts)	0.35
Compliance Equivalent Volume (Vas)	42.43 liters/1.50 cu.ft.
Peak Diaphragm Displacement Volume (Vd)	56.90 cc
Compliance of Suspension (Cms)	0.24 mm/N
BL Product (BL)	13.2 T-M
Moving Mass inc. Airload (Mms)	29.3 grams
Efficiency Bandwidth Product (EBP)	165.2
Maximum Linear Excursion (Xmax)	1.6 mm
Active Piston Area (Sd)	355.4 cm ²
Maximum Mechanical Limit (Xlim)	8.0 mm

Mounting Information

Recommended Enclosure Volume	
Sealed	0.19 - 0.60 cu.ft.
Vented	0.56 - 1.18 cu.ft.
Overall Diameter	10.13", 257.30 mm
Baffle Hole Diameter	9.05", 229.87 mm
Front Gasket	Yes, fitted as standard
Rear Gasket	Yes, fitted as standard
Mounting Holes Diameter	0.25", 6.35 mm
Mounting Holes B.C.D.	9.69", 246.13 mm
Depth	4.00", 101.60 mm
Net Weight	11.10 lbs., 5.03 kg
Packing Carton Dimensions	270 x 270 x 140mm

Materials of Construction


Former Material	Polyimide
Voice Coil	Copper
Magnet Material	Ferrite
Basket Material	Steel
Cone Description	Treated Paper/Sealed Cloth Edge
Dust Cap Material	Treated Paper

Sovereign 10-275

High-power driver for pro-sound or MI mid/bass applications. Works well for midrange in a small sealed box or as a mid/bass driver in small vented boxes.



FANE INTERNATIONAL LTD.
 Sovereign House
 Gilcar Way
 Wakefield Europort
 Castleford WF10 5QS
 England
 TEL +44 (0) 1924 224618
 FAX +44 (0) 1924 899166
 info@fane-international.com
 www.fane-international.com

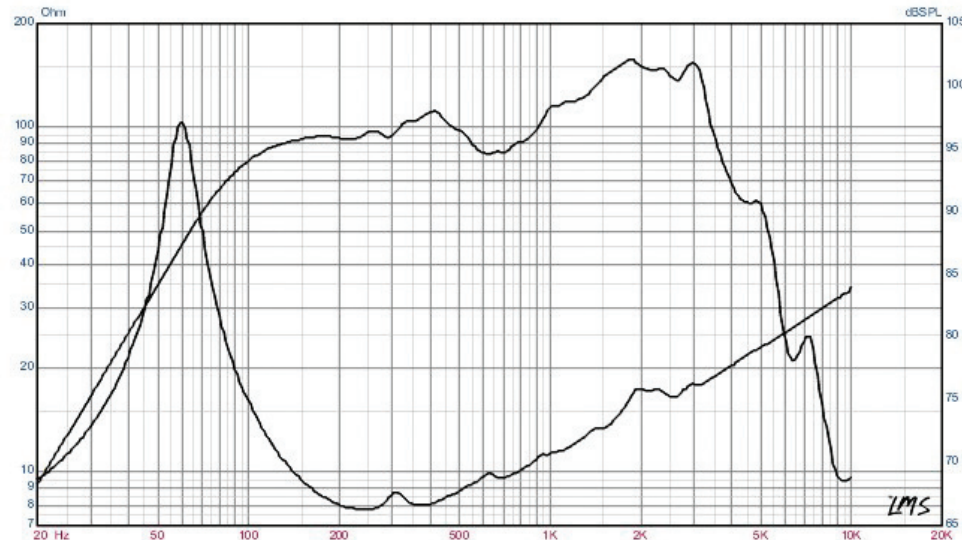

- 1 Please inquire about alternative impedances.
- 2 Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, nontemperature-controlled environment.
- 3 The average output across the usable frequency range when applying 1 W/1 M into the nominal impedance. I.e: 2.83 V/8 ohms, 4 V/16 ohms. Fane response curves are measured under the following conditions: All speakers are tested at 1 W/1 M using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1 M from wall/baffle | 2 ft. X 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)