

Specification

Nominal Basket Diameter	15.00", 381 mm
Nominal Impedance	8 ohms ¹
Power Rating	425 W ²
Usable Frequency Range	44 Hz-2.5k Hz ³
Sensitivity	98.0
Magnet Weight	80 oz.
Gap Height	0.39", 10.01 mm
Voice Coil Diameter	3.00", 76.2 mm

Thiele & Small Parameters

Resonance (fs)	43 Hz
DC Resistance (Re)	5.8
Coil Inductance (Le)	1.14 mH
Mechanical Q (Qms)	7.90
Electromagnetic Q (Qes)	0.44
Total Q (Qts)	0.42
Compliance Equivalent Volume (Vas)	180.60 liters/6.38 cu.ft
Peak Diaphragm Displacement Volume (Vd)	402.70 cc
Compliance of Suspension (Cms)	0.17 mm/N
BL Product (BL)	16.9 T-M
Moving Mass inc. Airload (Mms)	80.6 grams
Efficiency Bandwidth Product (EBP)	97.7
Maximum Linear Excursion (Xmax)	4.6 mm
Active Piston Area (Sd)	881.2 cm ²
Maximum Mechanical Limit (Xlim)	9.0 mm

Mounting Information

Recommended Enclosure Volume	
Sealed	1.00 - 1.90 cu.ft.
Vented	1.90 - 6.80 cu.ft.
Overall Diameter	15.16", 385.06 mm
Baffle Hole Diameter	13.84", 351.54 mm
Front Gasket	Yes, fitted as standard
Rear Gasket	Yes, fitted as standard
Mounting Holes Diameter	0.25", 6.35 mm
Mounting Holes B.C.D.	14.56", 369.82 mm
Depth	5.83", 148.08 mm
Net Weight	17.40 lbs., 7.89 kg
Packing Carton Dimensions	400 x 400 x 200

Materials of Construction


Former Material	Polyimide
Voice Coil	Copper
Magnet Material	Ferrite
Basket Material	Steel
Cone Description	Treated Paper/Sealed Cloth Edge
Dust Cap Material	Treated Paper

Sovereign 15-425

A high-power woofer with outstanding SPL output, for use in PA systems as well as MI and pro-sound applications. Ideally suited for medium to large vented boxes. Also works well in a sealed box as a mid/bass or as a floor wedge. Great for bass guitar in vented cabinets.



FANE INTERNATIONAL LTD.
 Sovereign House
 Gilcar Way
 Wakefield Europort
 Castleford WF10 5QS
 England
 TEL +44 (0) 1924 224618
 FAX +44 (0) 1924 899166
 info@fane-international.com
 www.fane-international.com

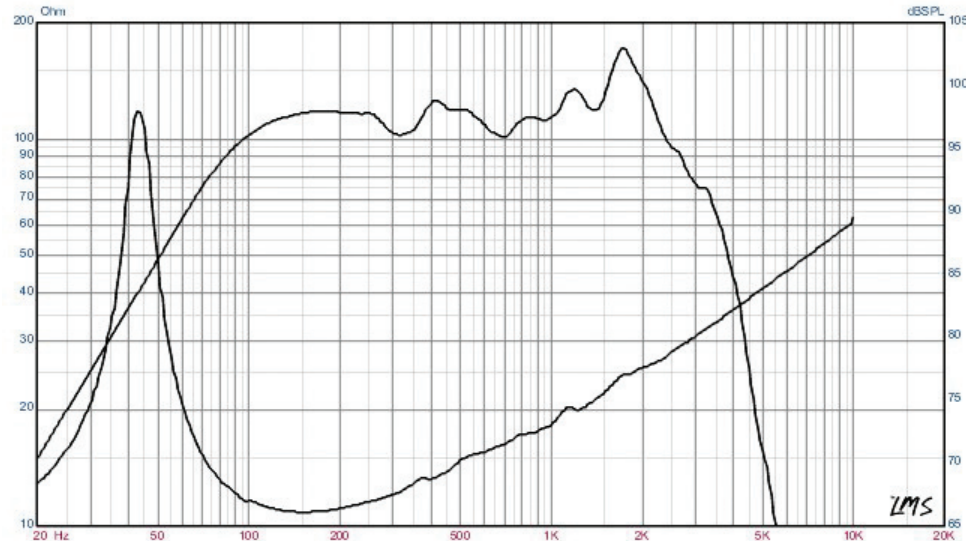

- 1 Please inquire about alternative impedances.
- 2 Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, nontemperature-controlled environment.
- 3 The average output across the usable frequency range when applying 1 W/1 M into the nominal impedance. Ie: 2.83 V/8 ohms, 4 V/16 ohms. Fane response curves are measured under the following conditions:
 All speakers are tested at 1 W/1 M using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1 M from wall/baffle | 2 ft. X 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)