

## Specification

Nominal Basket Diameter	8.00", 203 mm
Nominal Impedance	8 ohms <sup>1</sup>
Power Rating	125 W <sup>2</sup>
Usable Frequency Range	52 Hz-4.7k Hz <sup>3</sup>
Sensitivity	93.7
Magnet Weight	20 oz.
Gap Height	0.24", 5.99 mm
Voice Coil Diameter	1.50", 38.1 mm

## Thiele & Small Parameters

Resonance (fs)	73.9 Hz
DC Resistance (Re)	6.8
Coil Inductance (Le)	0.62 mH
Mechanical Q (Qms)	8.30
Electromagnetic Q (Qes)	0.76
Total Q (Qts)	0.70
Compliance Equivalent Volume (Vas)	16.66 liters/0.59 cu.ft.
Peak Diaphragm Displacement Volume (Vd)	68.10 cc
Compliance of Suspension (Cms)	0.26 mm/N
BL Product (BL)	8.6 T-M
Moving Mass inc. Airload (Mms)	17.7 grams
Efficiency Bandwidth Product (EBP)	96.7
Maximum Linear Excursion (Xmax)	3.3 mm
Active Piston Area (Sd)	214.0 cm <sup>2</sup>
Maximum Mechanical Limit (Xlim)	6.5mm

## Mounting Information

Recommended Enclosure Volume	
Sealed	1.00-3.00 cu.ft.
Vented	0.30 - 1.30 cu.ft.
Overall Diameter	8.24", 209.30 mm
Baffle Hole Diameter	7.10", 180.34mm
Front Gasket	Yes, fitted as standard
Rear Gasket	Yes, fitted as standard
Mounting Holes Diameter	0.22", 5.54mm
Mounting Holes B.C.D.	7.79", 197.87mm
Depth	3.30", 83.82mm
Net Weight	4.10 lbs., 1.86 kg
Packing Carton Dimensions	230 x 230 x 120mm

## Materials of Construction

Former Material	Polyimide
Voice Coil	Copper
Magnet Material	Ferrite
Basket Material	Steel
Cone Description	Paper/Cloth Edge
Dust Cap Material	Paper

# Sovereign 8-125


Medium-power driver ideal for use in PA systems as well as MI and pro-sound applications. Works well as a mid in small sealed boxes and as a mid/bass driver in vented boxes. Great for bass guitar in medium-sized vented cabinets.



# FANE

**FANE INTERNATIONAL LTD.**

Sovereign House  
Gillar Way  
Wakefield Europort  
Castleford WF10 5QS  
England  
TEL +44 (0) 1924 224618  
FAX +44 (0) 1924 899166  
info@fane-international.com  
www.fane-international.com

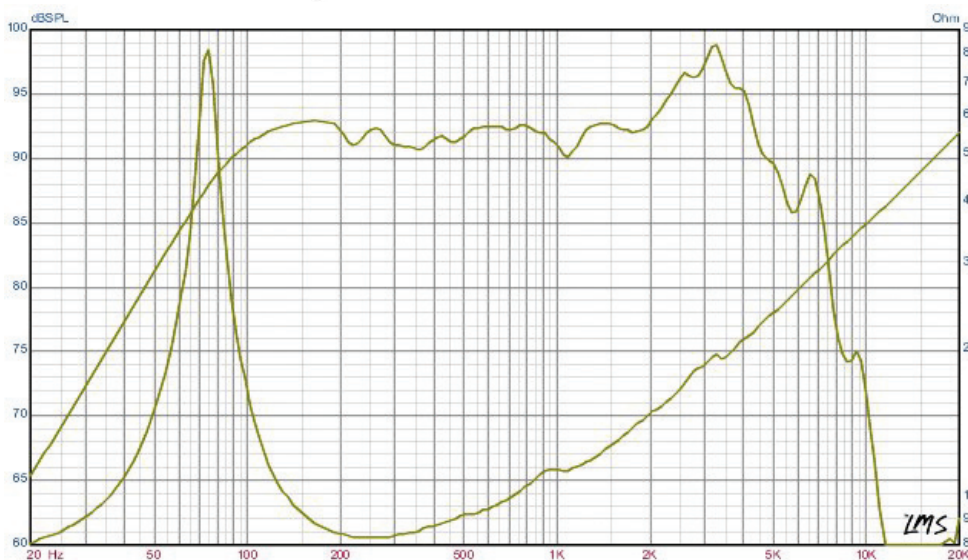

- 1 Please inquire about alternative impedances.
- 2 Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, nontemperature-controlled environment.
- 3 The average output across the usable frequency range when applying 1 W/1 M into the nominal impedance. ie: 2.83 V/8 ohms, 4 V/16 ohms. Fane response curves are measured under the following conditions:  
All speakers are tested at 1 W/1 M using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1 M from wall/baffle | 2 ft. X 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)